



ASSEMBLY INSTRUCTION


etherCON® TOP | NE8FDV-TOP, NE8FDP-TOP
NE8FDH-C5E-TOP

IP65 RATED AND UL50E APPROVED.

Panel thickness:
2.0 - 4.0 mm [0.079 - 0.157"]

Step 1: Separate the connector


- (A) Untighten the screw.
- (B) Remove flange
- (C) and gasket.

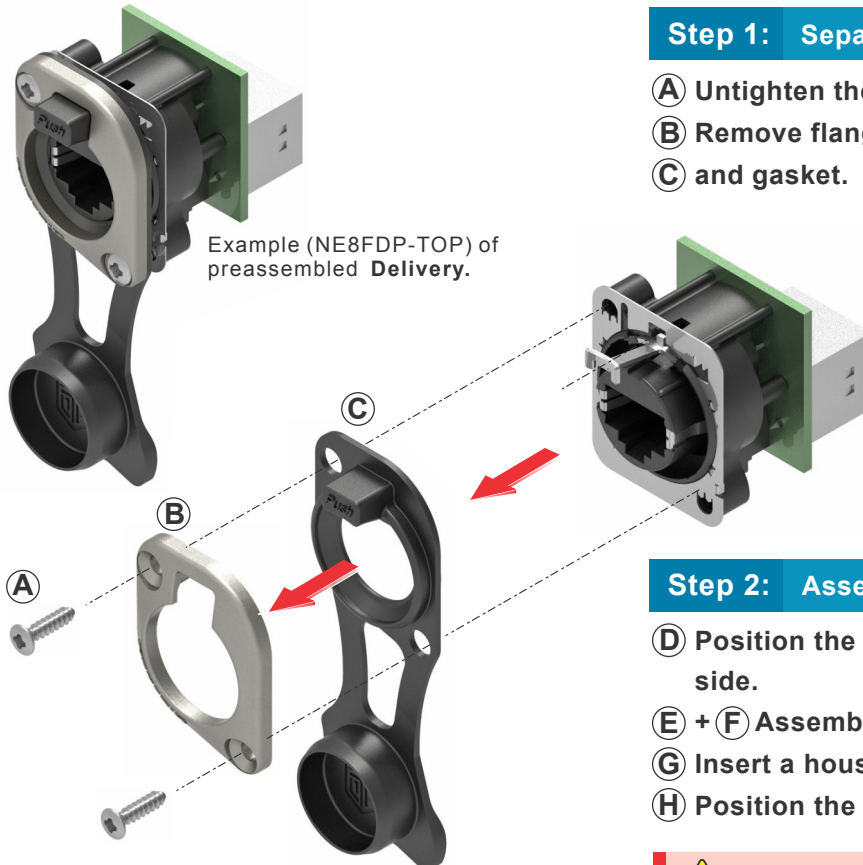

Example (NE8FDP-TOP) of
preassembled **Delivery**.

Step 2: Assembly

- (D) Position the receptacle onto the panel from rear side.
- (E) + (F) Assemble flange and rubber gasket together.
- (G) Insert a housing for **CENTERING** the kit.
- (H) Position the screw and fasten it.

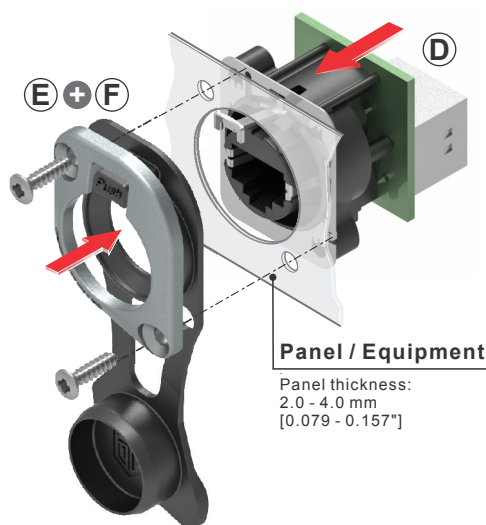

Panel / Equipment


Panel thickness:
2.0 - 4.0 mm
[0.079 - 0.157"]



Attention:
Tightening torque
 $M_A = 40 \text{ Ncm}$.



POZIDRIV® #1

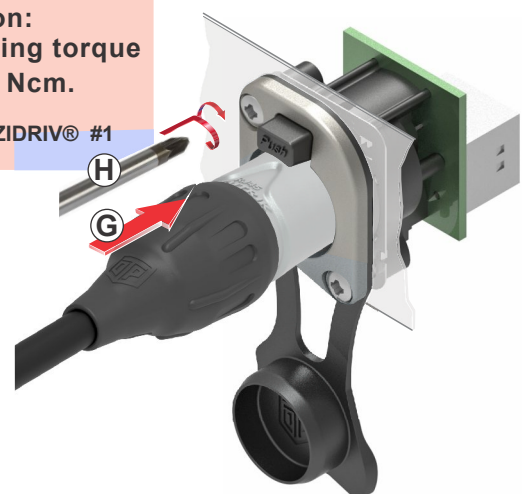

NOTE: Lubricate sealing lip with silicon from time to time.

NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93
NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704 / 438 9202
NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439
NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131 / 280 830

NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511
NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796
NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052
NEUTRIK India Pvt. Ltd. IND T: +91 / 982 05 43 424 F: +91 / 22 26163 540

Draft. Nr.: BDA 551 | Update: 25.07.2018 | Data subject to change without prior notice. ©2018 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® is a registered trademark.

www.neutrik.com

NEUTRIK®