



ASSEMBLY INSTRUCTION

SCD-W | Rubber sealing cover D-Series

SCNAC-FPX | Rubber sealing cover powerCON NAC3FPX

SCNAC-MPX | Rubber sealing cover powerCON NAC3MPX


Equipment / Panel

Sealing Cover SC*

Spacer

Chassis Connector

Screws

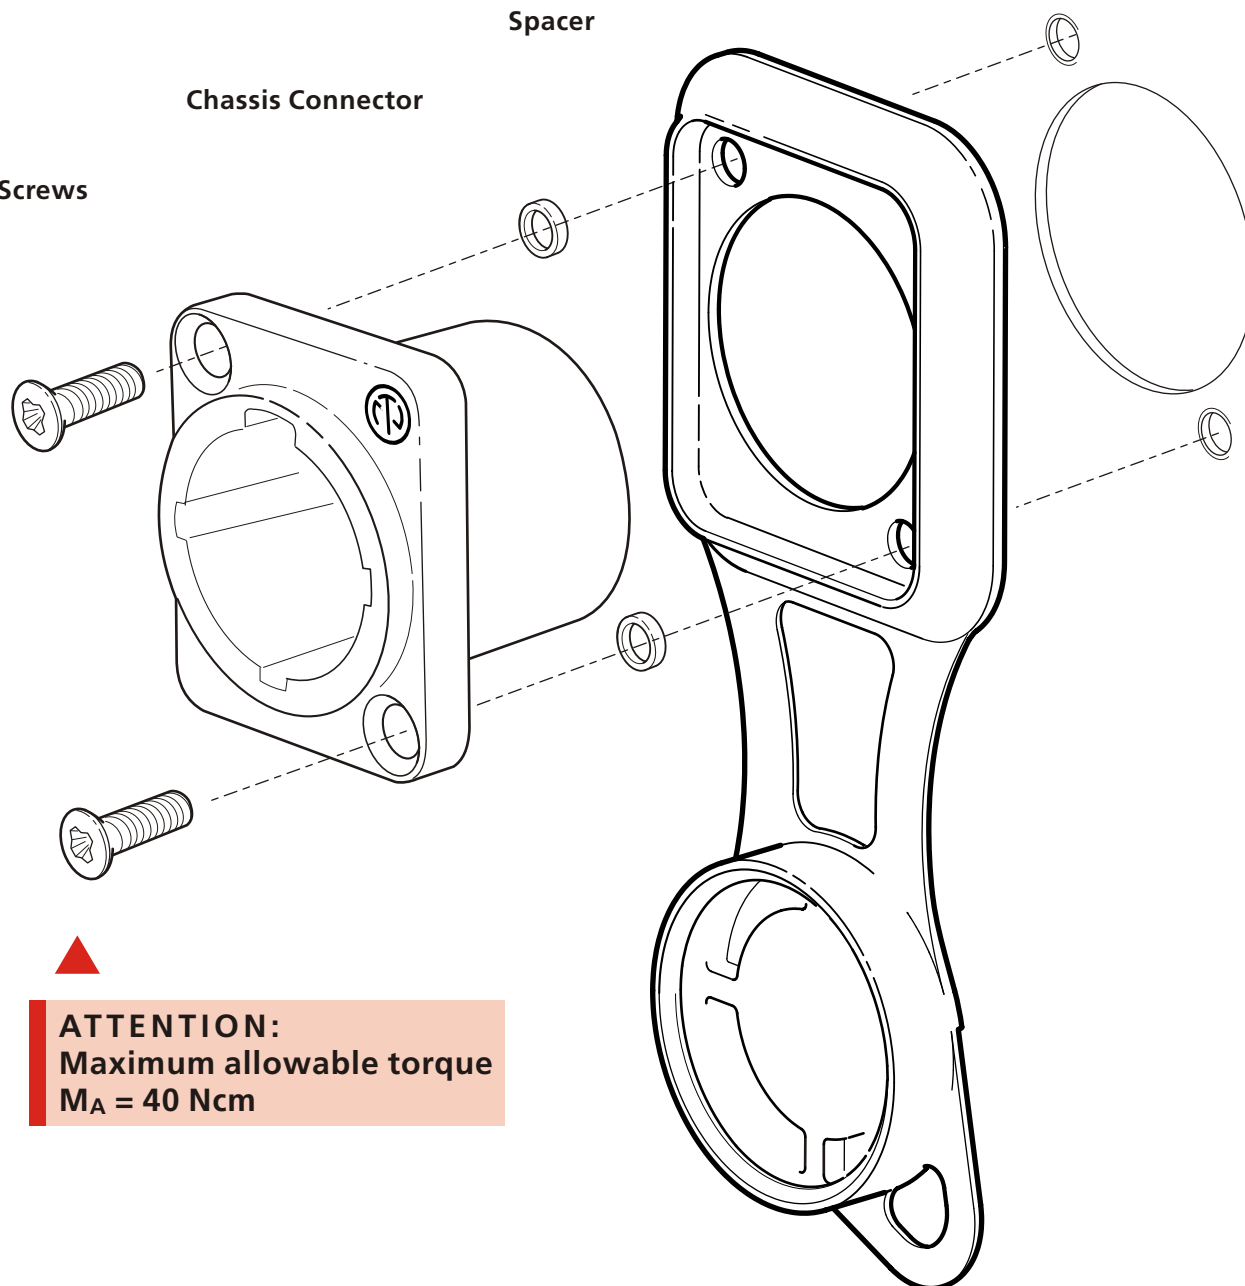

ATTENTION:
Maximum allowable torque
 $M_A = 40 \text{ Ncm}$

NEUTRIK AG
NEUTRIK USA Inc.
NEUTRIK (UK) Ltd.
NEUTRIK Vertriebs GmbH

LI
USA
UK
DE/NL/AT/DK

T: +423 / 237 24 24
T: +1 704 / 972 3050
T: +44 1983 / 811 441
T: +49 8131 / 280 890

F: +423 / 232 53 93
F: +1 704 / 438 9202
F: +44 1983 / 811 439
F: +49 8131 / 280 830

NEUTRIK France
NEUTRIK Tokyo Ltd.
NEUTRIK Hong Kong Ltd.

FR
JP
HK

T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055

F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052

Draft. Nr.: BDA 374 / 3102M2161 | Update: 22.05.2013 | Data subject to change without prior notice. ©2013 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.

www.neutrik.com

NEUTRIK®